

## Multi-Stage Dilation Balloons

MICRO-TECH's Disposable Multistage Dilation Balloon Catheter is designed to produce three distinct diameters at three separate pressures during in procedure.

Furthermore, the high-pressure design ensures that the balloon retains its shape over the entire working length, thereby allowing optimum dilation success.


Under different application of pressure, the balloon very rapidly acquires its precisely predefined expansion width.

Excellent workmanship and the use of premium materials, ensure that the MICRO-TECH balloons achieve the highest possible quality standard.



### Performance Characteristics:

- three distinct diameters at three separate pressures
- 2 X-ray markings
- separate guide wire and insufflation lumens
- conical shaped catheter tip
- very rapid expansion
- guide-wire compatible up to 0.035 inches

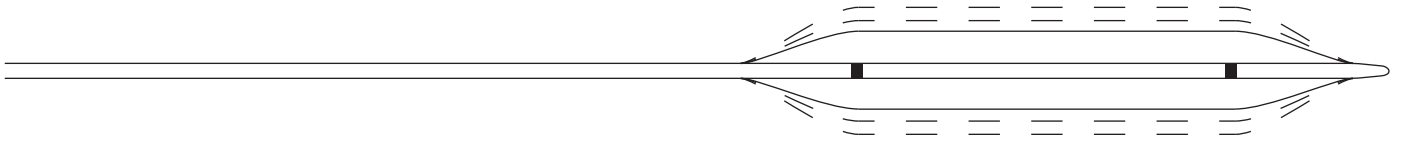

### Specifications:

REF	Balloon Diameter (mm)	Balloon 3 stage dilation pressure (atm)	Balloon length (mm)	Catheter Diameter (Fr)	Working length (mm)
Eg, REF for 3-stage					
MBD-AS-BB-2	6-7-8	3-6-10	30	7F	2300
MBD-AM-BA-2	6-7-8	3-6-10	55	7F	1800
MBD-AM-BB-2	6-7-8	3-6-10	55	7F	2300
MBD-AL-BA-2	6-7-8	3-6-10	80	7F	1800
MBD-BS-BB-2	8-9-10	3-5.5-9	30	7F	2300
MBD-BM-BA-2	8-9-10	3-5.5-9	55	7F	1800
MBD-BM-BB-2	8-9-10	3-5.5-9	55	7F	2300
MBD-BL-BA-2	8-9-10	3-5.5-9	80	7F	1800
MBD-CS-BB-2	10-11-12	3-5-8	30	7F	2300
MBD-CM-BA-2	10-11-12	3-5-8	55	7F	1800
MBD-CM-BB-2	10-11-12	3-5-8	55	7F	2300
MBD-CL-BA-2	10-11-12	3-5-8	80	7F	1800
MBD-DS-BB-2	12-13.5-15	3-4.5-8	30	7F	2300
MBD-DM-BA-2	12-13.5-15	3-4.5-8	55	7F	1800
MBD-DM-BB-2	12-13.5-15	3-4.5-8	55	7F	2300
MBD-DL-BA-2	12-13.5-15	3-4.5-8	80	7F	1800
MBD-EM-BA-2	15-16.5-18	3-4.5-7	55	7F	1800
MBD-EM-BB-2	15-16.5-18	3-4.5-7	55	7F	2300
MBD-EL-BA-2	15-16.5-18	3-4.5-7	80	7F	1800
MBD-FM-BA-2	18-19-20	3-4.5-6	55	7F	1800
MBD-FM-BB-2	18-19-20	3-4.5-6	55	7F	2300
MBD-FL-BA-2	18-19-20	3-4.5-6	80	7F	1800